



CONTAGAS



Corrosion & Abrasion
Resistant flow
Control



DIAPHRAGMS FOR STRAIGHT THROUGH TYPE DIAPHRAGM VALVES

www.kdvflow.com

MANUFACTURED EXCELLENCE

Manufacture

KDV manufactures a wide variety of premium quality reinforced diaphragms to suit a range of industrial valves. Our strict quality control standards and the use of only the best materials and construction methods ensures complete security of line media in the harshest of environments. No matter what the application, KDV diaphragms can be relied on to provide peace of mind and superior return on investment. Our specialist reinforcement and bonding techniques ensure that our diaphragms provide outstanding durability and security

KDV PTFE faced diaphragms provide a corrosion resistant barrier in applications where rubber is not appropriate. Our PTFE and EPDM food grade diaphragms carry FDA approval - and our PTFE diaphragms satisfy USP class 6 (USA pharmaceutical standard).

Features & Benefits

- **Durable**
- **Excellent compression qualities**
- **Chemical and abrasion resistance**
- **Superior leak tight sealing**



Styles

DN25 + "Screwed Style" - diaphragms are assembled by screwing the diaphragm stud into the corresponding female thread on the compressor.

DN15 - 80



DN100 - DN300



For detailed product information and assembly instructions visit www.kdvflow.com


Diaphragm Selection And Services

Materials

GRADE	MATERIALS	TEMP		SIZE RANGE		SERVICES/PROPERTIES
		°C	°F	Imperial	Metric	
10	Natural Rubber NR	-30 - 90	-22 - 194	1" - 12"	25 - 350mm	General purpose, abrasives, water, diluted minerals, acids
11	Natural Rubber Composite	-30 - 90	-22 - 194	1" - 8"	25 - 200mm	Abrasives, slurry and suspended solids
20	EPDM/Black	-40 - 135	-40 - 275	1" - 12"	25 - 350mm	General purpose, resistant to temperatures, most corrosive chemicals and abrasive liquids.
2F	EPDM/Food Grade (FDA)	-30 - 100	-22 - 212	1" - 8"	25 - 200mm	Food and pharmaceuticals.
30	Butyl Rubber IIR Chlorobutyl - Isobutylene Isoprene Halogenated	-20 - 120	-4 - 248	1" - 12"	25 - 350mm	Acids, alkalis, hot water, low pressure steam.
40	Nitrile Rubber NBR Acrylonitrile Butadiene Rubber	-20 - 90	-4 - 194	1" - 12"	25 - 350mm	Oils, fats & fuels.
50	Neoprene CR Chloroprene Rubber	-20 - 90	-4 - 194	1" - 12"	25 - 350mm	Air, weak chemicals, greases.
60	Hypalon® CSM Chlorosulfonated Polyethylene	-10 - 90	14 - 194	1" - 12"	25 - 350mm	Concentrated acids & alkalis, chlorine services.
70	FKM/Viton® FPM Fluorinated Elastomer	0 - 150	32 - 301	1" - 4"	25 - 100mm	High corrosion resistance at elevated temperatures.


Notes
 DN350 available in some grades on special order. Contact KDV for specifications and availability.
 Temperature range shown is a guide only.

Dimensions

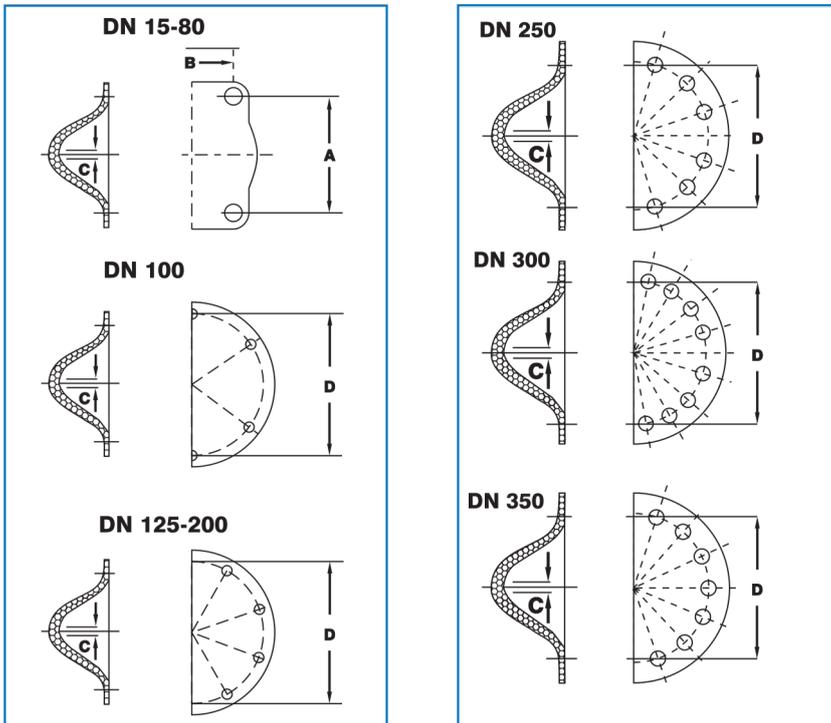


Nominal Size	A	B	C	D
15	30	55	3/16"W	
20	30	55	3/16"W	
25	50	64	1/4"W	
32	50	64	1/4"W	
40	50	64	1/4"W	
50	64	86	1/4"W	
65	102	134	3/8"W	
80	102	134	3/8"W	
100			3/8"W	171
125			5/8"W	254
150			5/8"W	254
200			5/8"W	305
250			5/8"W	381
300			1"W	451
350			1"W	527

Pressure/Temperature

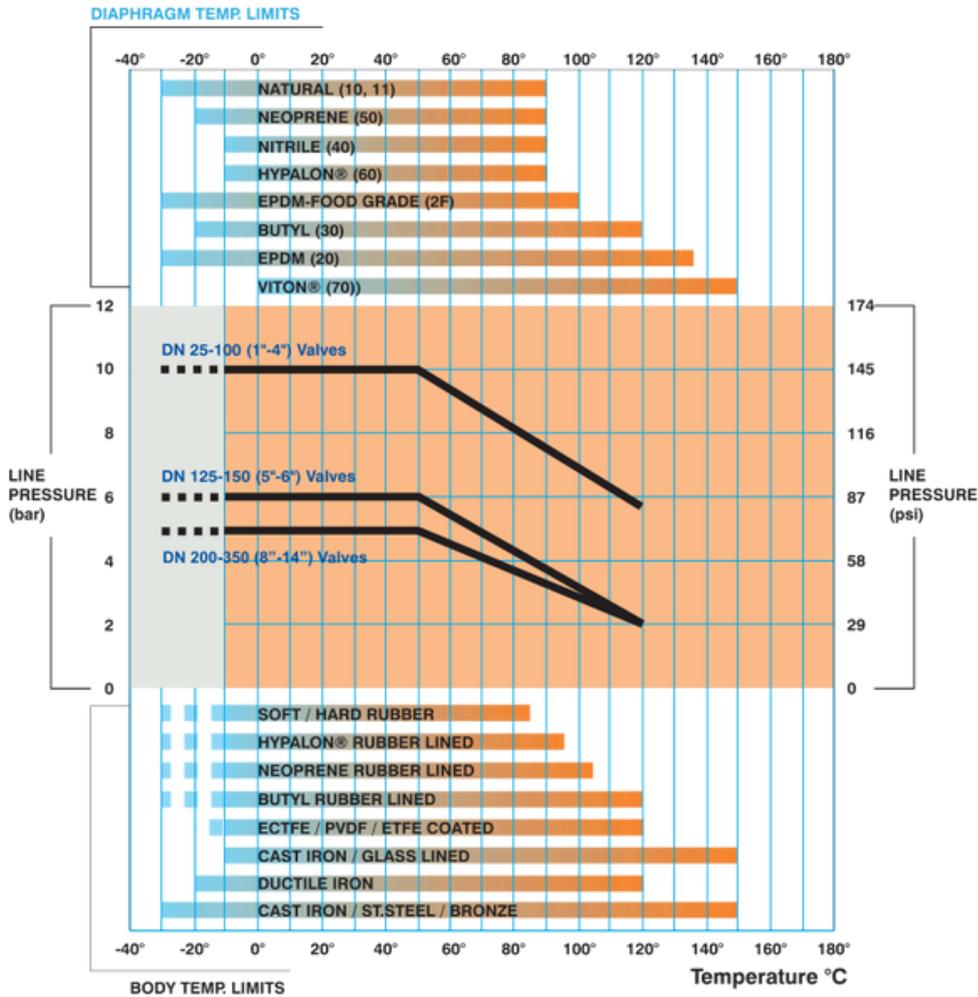

Diaphragm identification

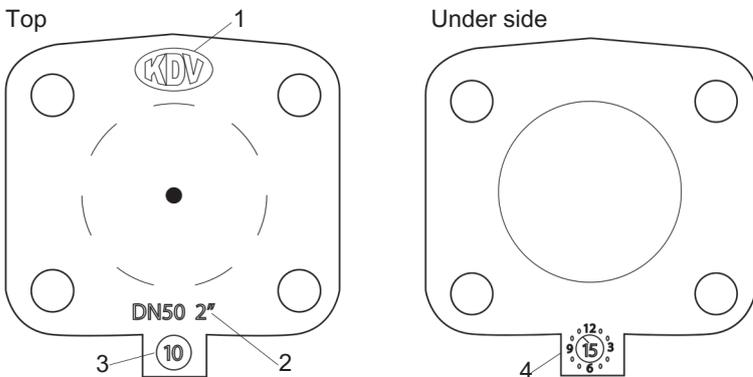

KDV diaphragms are stamped with size, grade and date of manufacture. This information provides measurement of service life and precise identification for re-ordering.

1. Genuine KDV part stamp
2. Size
3. Grade
4. Manufacturer code



www.kdvflow.com

Head Office | Australia
Email: info@kdvflow.com

United Kingdom
Email: info@kdvflow.co.uk

Thailand
Email: info@kdvflow.co.th

Singapore
Email: info@kdvflow.com

Dubai
Email: info@kdvflow.com

China
Email: info@kdvflow.com

India
Email: info@kdvflow.com

Philippines
Email: info@kdvflow.com



Kim Diaphragm Valves

focus: flow

KDV - Kim Diaphragm Valves Straight Through Type (ST)



Straight Through
Type ST

Diaphragm Valves

KDV: A Passion for Perfection



KDV – established in Australia in 1979, specialises in the manufacture and distribution of a wide range of industrial valves.



The company's core product group, continues to be the range of Kim Diaphragm Valves, now marketed internationally under the KDV brand.

The expansion of the business over the years has seen exponential growth of the KDV product base, which now includes a wide range of both manually, operated and automated diaphragm valves.

These products incorporate features now demanded by instrumentation and mechanical engineers from a wide range of industries such as:

- Water treatment
- Mining
- Chemicals and
- Manufacturing



Product features such as a range of body materials, linings, diaphragm materials and automated operators enable the KDV diaphragm valve to be one of the most versatile products available on the flow control market.

The success of KDV over the years has been primarily built upon product quality, the ability to have it readily available in the marketplace and the experience of the KDV team supporting customers, consultants, designers and end users.

An international network of dedicated KDV flow control specialists ensure that the correct product is selected and where necessary, individually "tailored" to suit the application.

With the versatility of the KDV diaphragm valve as a cornerstone, the organisation has become a major supplier to many industries – for both major **projects** and for ongoing maintenance **supply contracts**.



The interchangeability of KDV components with other internationally recognised products has provided a steady growth in the key area of supply of spares and assembled valves. KDV support this growth with one of the largest stock holdings of spare parts and accessories for diaphragm valves.

The KDV mantra of "Corrosion & Abrasion Resistant Flow Control" has seen the product range grow to incorporate other PFA/PTFE lined valve types including butterfly valves, check



valves, plug valves and ball valves. These products when combined with a range of lined pipe and fittings allows KDV to provide more than just diaphragm valves; but total flow control solutions for corrosive environments.

A documented quality assurance system in accordance with ISO 9001:2000 underpins KDV's commitment to customer satisfaction.

Around the globe, customers depend on KDV to supply quality products that perform reliably, meet site standards and comply with up to date Occupational Health and Safety (OH&S) requirements.

KDV is more than just a brand. It's a promise of quality product and quality support from people who understand your needs.



The KDV Diaphragm Valve Advantage



The range of KDV Straight Through Type (ST) Diaphragm Valves are manufactured in accordance with international standards. Available with a wide range of construction materials and lining options, the quality of KDV Diaphragm Valves helps to deliver the full potential of a simple yet versatile and effective flow control design concept.

Valve bodies, linings and diaphragms in hundreds of different combinations offer tailored solutions to suit almost any corrosive or abrasive fluid. Because the flowing media does not come into contact with the working components of the valve, total service life is dramatically increased.

The combination of inexpensive components, fast, easy inline maintenance and long service life make KDV Diaphragm Valves an attractive solution for many applications.

KDV Diaphragm Valves are used extensively throughout many industries. In fields such as:

- Chemical Processing
- Mining & Mineral Processing
- Power generation
- Water Treatment & Filtration
- Electroplating
- Steel Production
- Food & Beverage
- Paints & Coatings
- Textiles & Leather
- Semiconductors
- Pharmaceuticals
- Sugar
- Pulp & Paper.

This wide industrial use is directly attributable to the advantages that a KDV Diaphragm Valve delivers.

BENEFITS

- **Low initial cost.**
Simple design and low manufacturing complexity provide your application with a low cost, low maintenance, high performance solution.
- **Superior performance.**
"Bubble-tight" shutoff. Individually tested to provide a total seal to ANSI Class VI Standards.
- **Trouble-free operation.**
A bonnet design, free of packing and glands, removes the need for periodic adjustment and replacement.
- **Excellent throttling characteristics.**
Reliable flow regulation between 15% to 85% of rated capacity.
- **Easy maintenance.**
Diaphragm replacement can be performed with the valve "in-line" - reducing plant downtime and maintenance costs.
- **Clean Design.**
The body contains no internal cavities or crevices that can trap fluids.
- **Self-draining.**
Installation at the correct angles allow the body to self drain.
- **Omni-positional.**
Will operate equally well in any position and flow direction.
- **Position indication.**
See at a glance if a valve is in the open, shut or partially open position.
- **Expandable.**
A wide choice of bonnets and other accessories are available to refine the performance of a KDV Diaphragm Valve to exactly suit your application.
- **Process Automation.**
A wide variety of automatic actuators are easily installed with the valve "inline" and without specialist tools.
- **Component interchangeability.**
Genuine KDV components are interchangeable with other internationally recognised products, reducing spare parts inventory and streamlining maintenance.

Users across a wide range of industries have discovered the benefits of KDV Diaphragm Valves.



In North America, KDV Straight Through Type diaphragm valves are used in fertilizer production for acidic slurries, in mineral processing for such applications as hydrometallurgy and in sewage treatment for flow control of solids containing media, all applications requiring a low maintenance valve.



Diaphragm Valve Components



All KDV handwheels are designed for functional use and comfortable handling.

Unique bonnet design provides overclosure protection for the diaphragm in the closed position. These two metal surfaces will seat and prevent overcompression of the diaphragm.

Bonnet is painted bright yellow under handle skirt to provide clear indication of valve position from any angle.


Bonnet self-drains when mounted at slight angle.

Precision machined from stainless steel provides long term corrosion resistance.

Conforms to contours of diaphragm for support during opening and closing.

Flexible membrane provides positive closure and isolates bonnet components from fluid stream.

The interior's smooth contours provide unrestricted flow and minimum pressure loss.

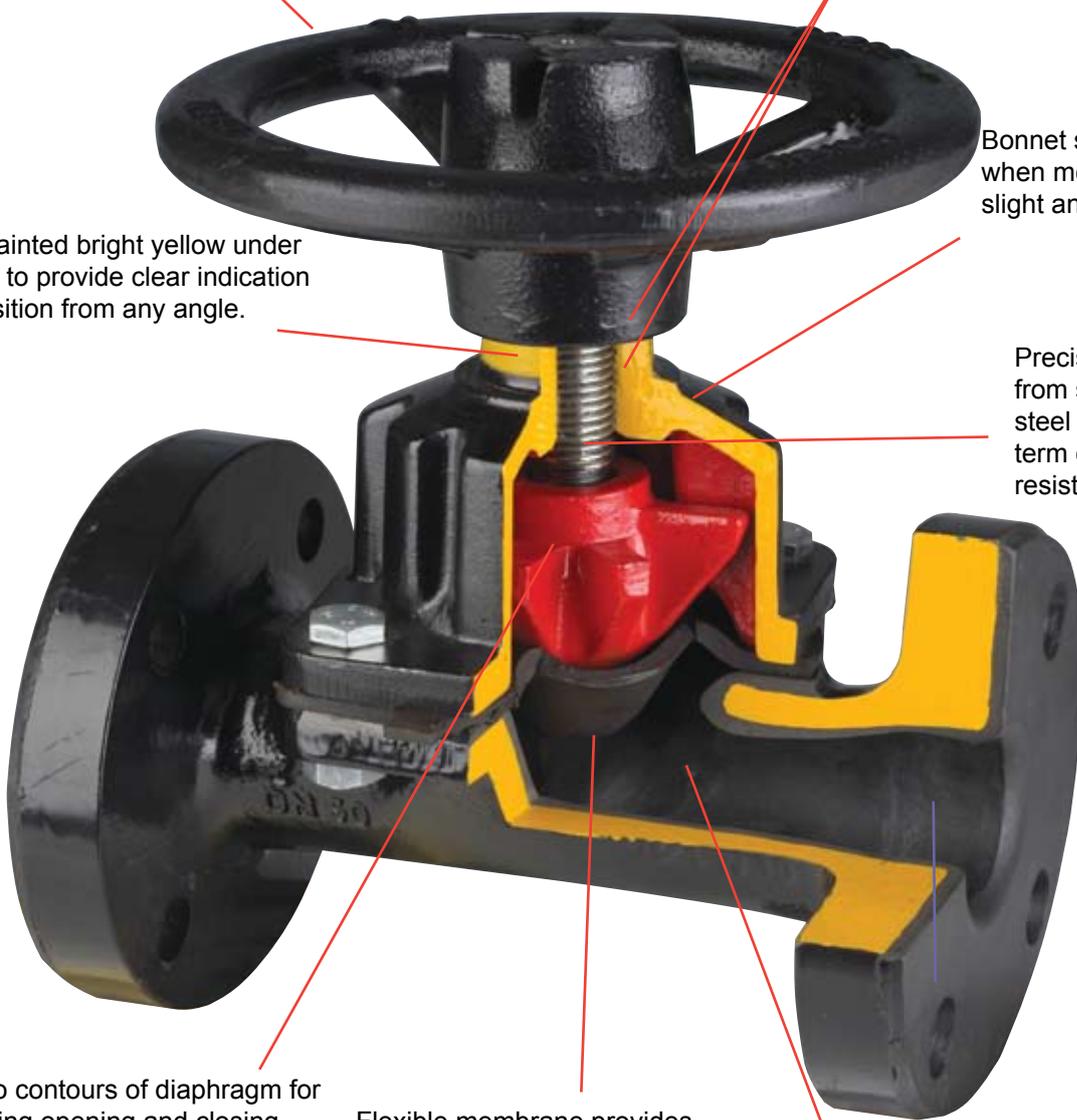


In Asia, KDV Straight Through Type diaphragm valves are used in phosphate processing for acidic slurries, in pigment manufacture and in mining for flow control of solids containing media, all ideal applications for full flow style lined valves offering low maintenance costs and zero leakage.



Working Pressure and Temperature

Higher temperatures will lower the physical properties of the various diaphragm materials, requiring a decrease in working pressure and possibly adversely affecting diaphragm life. Valve body material is also a key consideration for both low and high temperature applications.

For diaphragms and valves with bodies - Lined and unlined

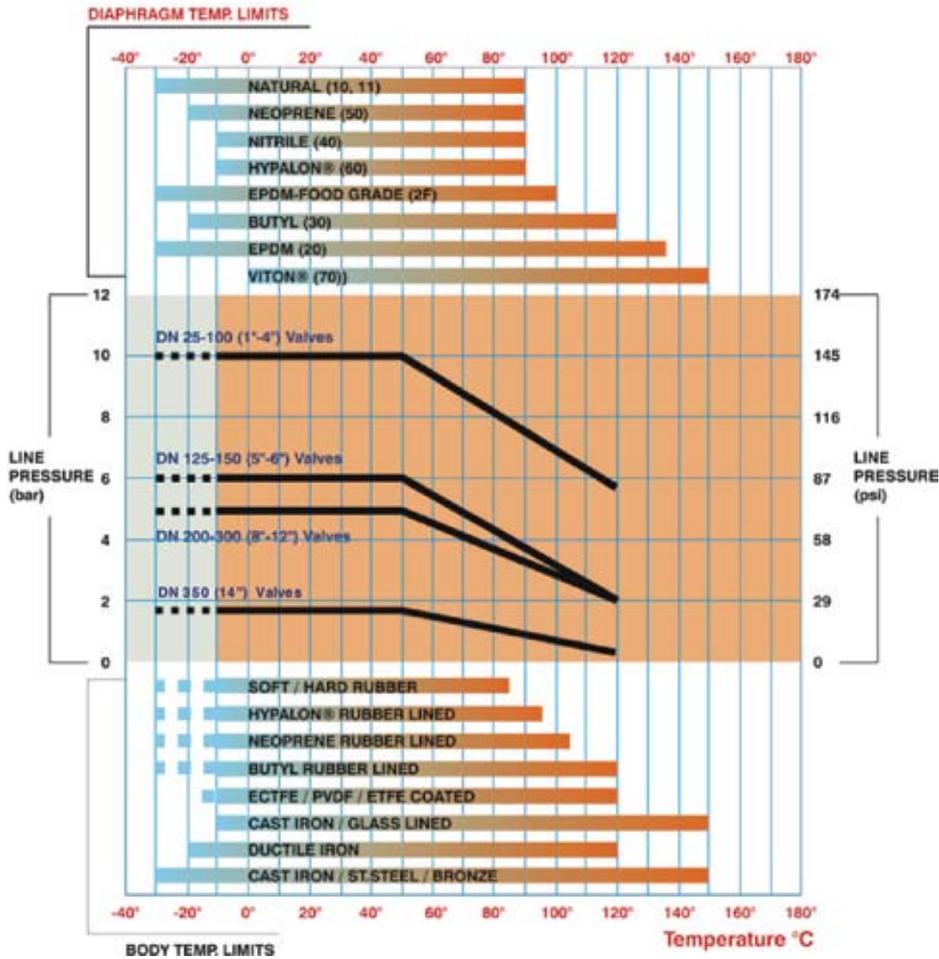

Maximum recommended working pressure

Valve Size		Pressure	
DN (mm)	INCH	Bar	psi
25-100	1-4	10	145
125-150	5-6	6	87
200-300	8-12	5	73
350	14	1.75	25



Valve and Body Selection

The flexibility of body selection in KDV Straight Through Type Diaphragm Valves can be seen in the table below. With a wide range of base body materials including cast/ductile iron and SS, elastomeric linings, fluoro-polymer coatings and other specialty coatings, our range enables our valves to be optimised to suit many corrosive and abrasive environments.

The majority of body materials can be lined with our coatings and elastomer linings. The selection of the best body material to suit an application is made based on such variables as: media type, temperature and pressure; frequency of thermal cycling, percentage of solids, particle size profile, required end

connections and size.

It is necessary to consider many other variables before finalising a selection. These include:

- Service chemical(s)
- Concentration
- Percentage solids and particle size profile
- Velocity of service
- Proximity of valve to pipe-work direction changes
- Working temperature – minimum/normal/maximum
- Working pressure – minimum/normal/maximum
- Frequency of operation (throttling requirements)

MATERIAL	END CONNECTION	SIZE AVAILABLE		TEMP.	
		inch	mm	°C	
UNLINED BODY	Cast Iron	Screwed	½" - 3"	15 - 80	-10 to 175°
		Flanged	½" - 14"	15 - 350	-10 to 175°
	Ductile Iron	Screwed	½" - 3"	15 - 80	-10 to 175°
		Flanged	½" - 12"	15 - 300	-10 to 175°
	Cast Steel	Screwed	½" - 3"	15 - 80	-30 to 175°
		Flanged	½" - 12"	15 - 300	-30 to 175°
	Cast St Steel	Screwed	½" - 3"	15 - 80	-30 to 175°
		Butt Weld	½" - 2"	15 - 80	-30 to 175°
ELASTOMER LINED BODY	Soft Rubber	Flanged	½" - 14"	15 - 350	-10 to 85°
		Hard Rubber	Flanged	½" - 14"	15 - 350
	EPDM Rubber	Flanged	½" - 14"	15 - 350	-10 to 110°
	Butyl Rubber	Flanged	½" - 14"	15 - 350	-10 to 110°
	Neoprene Polychloroprene	Flanged	½" - 14"	15 - 350	-10 to 95°
	Hypalon® Chlorosulpho- nated PE	Flanged	½" - 12"	15 - 300	-10 to 95°
	Urethane	Flanged	1½" - 12"	40-300	10 to 60°
COATED BODY	GLASS	Flanged	1" - 8"	25 - 200	175°
	ECTFE (Halar®)	Flanged	1" - 12"	25 - 300	120°
	ETFE	Flanged	1" - 12"	25 - 300	149°
	PVDF	Flanged	1" - 12"	25 - 300	130°
	NYLON	Flanged	1" - 12"	25 - 300	80°
FBE (Fusion Bonded Epoxy)	Flanged	1" to 8"	25-200	90°	

* Maximum Continuous Service Temperature
(Refer also to Specific Chemical resistance guide for media information and Pressure/Temperature chart on page 5.)

Standard Specifications

Design Standards

- EN13397-2001(BS5156:1985)
- MSS SP-88

Face to Face Standards

- EN558-1 Series 1(DIN3202-F1)
- EN558-1 Series 7(BS5156)
- MSS SP88-1995(R-01)

Testing Standards

- EN12266-2 2002(BS6755 Part 1)

Material Specifications – Metal Bodies

- Cast Iron (ASTM A126 Cl B)
- Ductile Iron (ASTM A395 60-40-18)
- Carbon Steel (ASTM A216 Gr WCB)
- Stainless Steel (ASTM A351 Gr CF8)
- Stainless Steel (ASTM A351 Gr CF8M)
- Stainless Steel (ASTM A351 Gr CF3M)
- Alloy 20 (ASTM A351 Gr CN7M)
- Hastelloy C ASTM A-494 Gr CW-6M
- Bronze ASTM A83600 LG2/4

Flange Valve Drilling Standards

- ANSI B16.5 Class 125 & 150
- EN1092 PN10/16) (BS4504)
- AS2129-2000 Table D/E (BS10 1962)
- JIS B2220

Screwed Valve Thread Standards

- ANSI B2.1 NPT
- AS1722.1 Part 1 BSPP



In South and Central America, KDV Straight Through diaphragm valves are used in gold mining and mineral processing for flow control of abrasive and corrosive slurries.



Fluid behaviour differs according variables such as process conditions, temperature, concentration, pressure, nature of the flow, installation & design and site experience and these variables should be taken into account in the application of the above guidelines.

There are many critical services that demand a lined body for maximum chemical or corrosion resistance. KDV Valves offers the above standard linings with many other special linings and coatings available on request. Special linings and coatings are available to suit specific applications where combinations of corrosion and abrasion occur. Not all linings as above are

available in all different face to face standards.

We recommend that your selection is confirmed with an Engineer from KDV or an authorised KDV distributor.

KDV bodies can be identified by heat number traceability when requested at order and linings are spark tested in accordance with the relevant standards.

FACE TO FACE DIMENSIONS						
DN SIZE mm	FLANGED			SCREWED		
	EN588-1 Series 7 BS-5156/ANSI -125 UNLINED	EN558-1 Series 1 DN 3202 F-1 LINED/UNLINED	MSS-SP88-01 UNLINED	CAST IRON	STAINLESS STEEL	DN-INCHES
15	108	130	102	64	64	0.5
20	117	150	140	83	83	0.75
25	127	160	140	108	108	1
32	146	180	165	121	121	1.25
40	159	200	165	140	140	1.5
50	190	230	190	165	165	2
65	216	290	216	203	203	2.5
80	254	310	254	254	254	3
100	305	350	318	n/a	n/a	4
125	356	400	356	n/a	n/a	5
150	406	480	406	n/a	n/a	6
200	521	600	521	n/a	n/a	8
250	635	730	635	n/a	n/a	10
300	749	850	749	n/a	n/a	12
350	980	980	n/a	n/a	n/a	14

For Rubber Lined Bodies - add to total length (except for EN588-1 Series 1 / DN3202-F1),
 • 6mm for DN15 - DN80,
 • 8mm for DN100 - DN200,
 • 10mm for DN250 - DN350.
 For Plastic Lined Bodies - add to total length (except for EN558-1 Series 1/DN 3202 -F1)
 • 6mm for DN15 - DN200

• Individual data sheets / GA drawings available on internet site www.kdvflow.com or upon request.



In Australia and New Zealand, KDV Straight Through Type diaphragm valves are used in fertilizer production for acidic slurries, in gold mining and mineral processing, pigment manufacture and sewage treatment. The KDV Butt Weld valve is widely used in the wine industry for solids/musk control on SS tanks.



Diaphragm Selection and Services



GRADE	MATERIALS	TEMP		SIZE RANGE		TYPICAL SERVICES
		°C	°F	Imperial	Metric (mm)	
10	Natural Rubber	-30 to 90	-22 to 194	1" to 12"	25 to 300	General Purpose, abrasives, water, diluted minerals acids,
11	Natural Rubber Composite	-30 to 90	-22 to 194	1" to 8"	25 to 200	Abrasives, slurry and suspended solids
20	EPDM/Black	-40 to 135	-40 to 275	1" to 12"	25 to 300	General Purpose, resistant to temperatures, most corrosive chemicals and abrasive liquids.
2F	EPDM/food grade	-30 to 100	-22 to 212	1" to 8"	25 - 200	Food and pharmaceuticals
30	Butyl Rubber	-20 to 120	-4 to 248	1" to 12"	25 to 300	Acids, alkalis, hot water, low pressure steam
40	Nitrile Rubber	-20 to 90	-4 to 194	1" to 12"	25 to 300	Oils, fats & fuels
50	Neoprene	-20 to 90	-4 to 194	1" to 12"	25 to 300	Air, weak chemicals, greases
60	Hypalon*	-10 to 90	14 to 194	1" to 12"	25 to 300	Concentrated acids & alkalis, chlorine services
70	Viton * FKM	0 to 150	32 to 301	1" to 4"	25 to 100	Concentrated sulphuric & other acids, aromatic hydrocarbons, chlorine services


- Temperature range shown is a guide only. For specific services contact your local KDV distributor.
- Diaphragms at maximum temperatures cannot be used satisfactorily at maximum pressures. See pressure/temperature chart on Page 5.



In Europe, Scandinavia and Russia, KDV Straight Through Type diaphragm valves are used in processing of acidic slurries, in mineral processing and in mining, incorporating manual and automated control systems, for flow control of media containing solids.



Diaphragm Dimensions

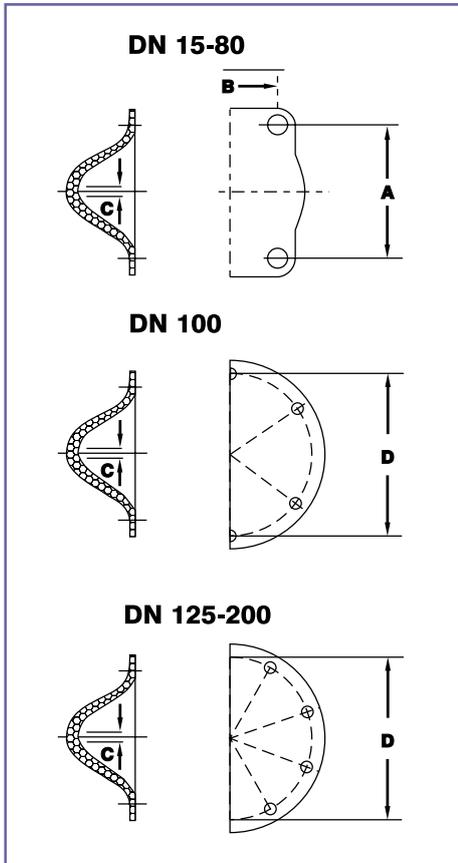

Identification of a valve size can be performed by matching dimensions with those of the diagrams and table below.

Nominal Size	A	B	C	D
15	30	55	3/16"W	
20	30	55	3/16"W	
25	50	64	1/4"W	
32	50	64	1/4"W	
40	50	64	1/4"W	
50	64	86	1/4"W	
65	102	134	3/8" W	
80	102	134	3/8" W	
100			3/8" W	171
125			5/8" W	254
150			5/8" W	254
200			5/8" W	305
250			5/8" W	381
300			1" W	451
350			1"W	527




Diaphragm Styles

Elastomer Diaphragms:

DN15 + "Screwed Style" - diaphragms are assembled by screwing the diaphragm stud into the corresponding female thread on the compressor.

Assembly of Diaphragms

Screw the threaded stud into the compressor and turn, tightening completely. Rotate back counter-clockwise to align the holes. Bonnet and diaphragm are then ready to be assembled onto the body by tightening the bolts diagonally and evenly. Torque levels for each size can be found in the Installation and Maintenance Manual.

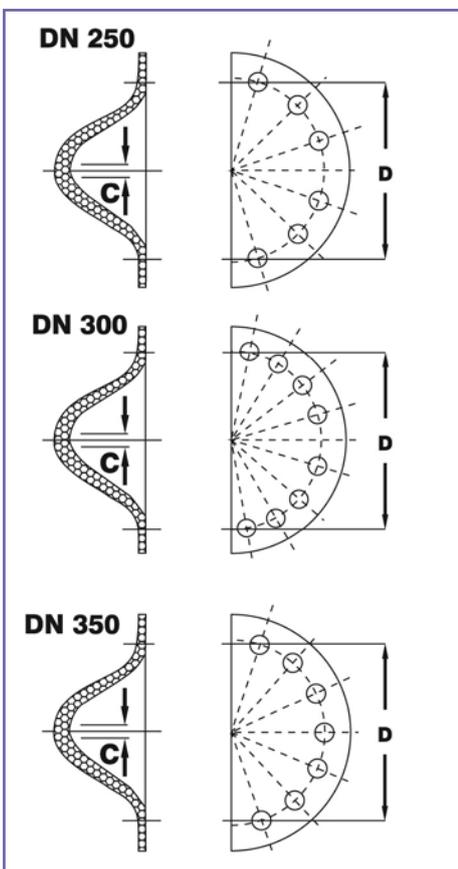

KDV[®] OVER-CLOSURE PROTECTED BONNET



Stem sealed handwheel



Non-rising handwheel




Lockable rising handwheel



Lockable rising handwheel



FBE nylon coated rising handwheel body

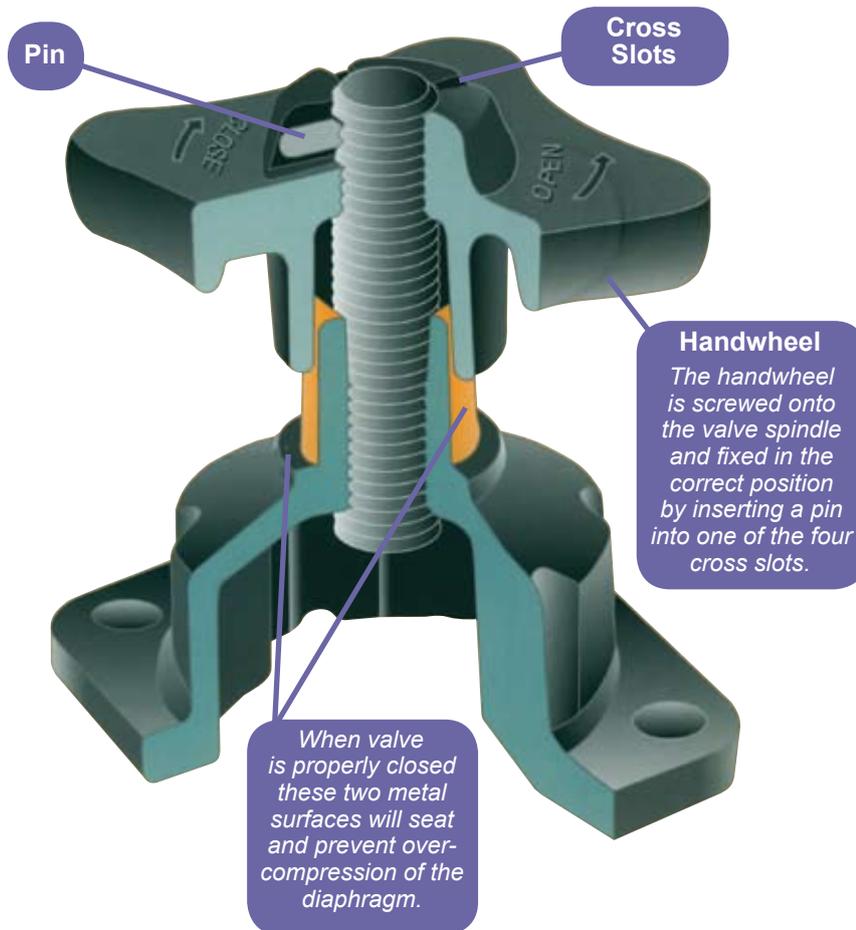

Bonnet/Operator variations

- **Chain-wheel** adapted bonnet for valves in elevated positions – fitted with chain wheel, guides and chain to suit the “drop” required.
- **Extension Spindle** for valves in inaccessible positions – can be single straight extension or fitted with single/multiple universal joints and/or fitted with key operation for pit environment.
- **Sealed bonnet** assembly fitted with FKM O-Ring spindle seals
- **Stainless Steel bonnet** assemblies in Non Rising handwheel configuration for environmental corrosion applications with OH&S lockout system as an option. Larger sizes fitted with ball thrust bearing on handwheel.
- **Coated bonnets** and SS bonnets for environmental corrosive/high temperature services.
- **Sliding spindle bonnet** assemblies to suit adaptation to specific automation systems – cylinders, diaphragm actuators
- **Automation systems** – KDV actuators in various configurations with many accessories to suit control and automated isolation valve applications using pneumatic or electric actuators.
- **Normally Closed/Open and Double Acting** diaphragm operated pneumatic actuators in various materials – cast iron, stainless steel or steel, fitted with accessories such as limit stops, visual position indication, emergency handwheel over-ride device, mechanical or proximity switches, pneumatic and electro pneumatic positioners.

Overclosure adjustment in five easy steps...



1 Remove handwheel pin.



2 Turn handwheel anti-clockwise one turn.



3 Insert a piece of steel wire.



4 Close valve tightly and remove steel wire.



5 Turn handwheel clockwise until sleeve seats on bonnet rim and re-insert handwheel pin.

Other Valve Types and Automated Controllers



KDV diaphragm valves can be automated using a variety of actuation systems. Pneumatic actuation is achieved by piston/cylinder or diaphragm operation; both can be fitted with a wide range of accessories including:

- solenoid valves
- switch enclosures
- electro-pneumatic positioners
- limit stops
- emergency hand wheel overrides.

The range offers a low maintenance solution for the control of corrosive and erosive media where repeated control and integration into plant control systems is of paramount importance. KDV electric actuators are available in a wide range of voltages and configurations and can be offered using all world wide brands of valve electric actuators.

A KDV automation/control package is available to suit your specific process conditions, offering tailored features to optimise production and minimise maintenance downtime.



Weir Type
Diaphragm Valves



High Purity
Diaphragm Valves



Plastic Valve
Systems



PFA Lined
Ball Valves



Flap Check
Valves



PTFE Lined
Butterfly Valves



Kim Diaphragm Valves Pty. Ltd.

Corporate Head Office: 16-18 Overseas Drive,
Noble Park, Vic.
Australia, 3174
Tel: +61 (3) 8793 4000
Fax: +61 (3) 8793 4040
Email: info@kdvflow.com

AVAILABLE FROM:

www.kdvflow.com

The information above is for general guidance only. Kim Valves Australia Pty. Ltd. reserves the right to change specifications without notice. KDV, Kim Diaphragm Valves and logo are Trade Marks and Registered Trade Marks. ©Copyright 8/2008, Kim Valves Australia Pty. Ltd.

ART1002-05/09